

double swing Akina



Age indication



Speed



Senses





Social skills

Scope of delivery

1x swing frame: softwood, galvanised steel

2x swing seat: galvanised steel, rubber, stainless steel









post shoes: galvanised steel







double swing Akina



Technical data

	Material	SW pi
	Minimum space	5,40x8,00x3,62 m
	Impact protection net	24,0 m ²
	Free falling height	149 cm
	Ground constitution DE/NL/BE	at least lawn
	Ground constitution all except DE/NL/BE	at least lawn
	mx. number of users	2
	Certificate	Z2_010651_0516_REV00


Installation information

	Foundations	5x CF or 5x PFs
	Fundamentlevel	ET 400
	Assembly	2 persons/6 h
	Lifting devices	Excavator



5 25 905 011 00

double swing Akina

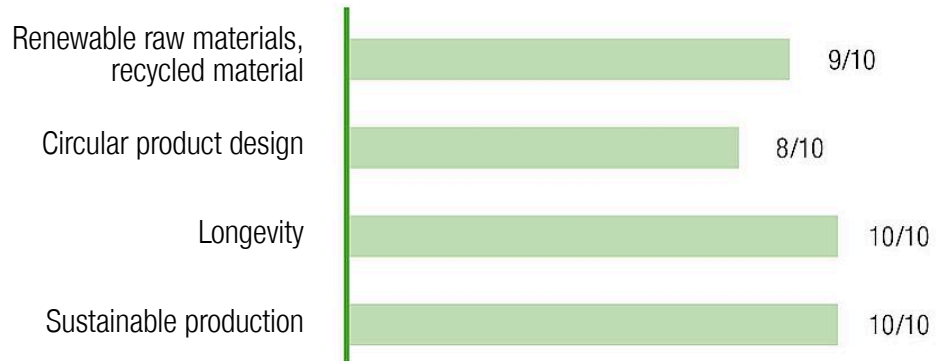

CO₂ emissions of the product

395,3 kg

Material share of renewable raw materials

84%

Recyclate content

14%

Circularity score



Weighted emission factor of the product*



Disclaimer:

This dashboard for the circularity index of the 'Circular Product' certification was generated automatically and is based on the corresponding certification of eibe Produktion + Vertrieb GmbH & Co KG, Industriestraße 1, 97285 Röttingen, which was issued on 16 May 2024 by the Gesellschaft für Klimaschutz München GmbH (GKM GmbH) on the basis of the example product Albion play unit from the eibe unique® product line. eibe Produktion + Vertrieb GmbH & Co KG is liable for the accuracy of the contents. The award criteria of the private-law certification 'Circular Product' of GKM GmbH can be viewed at gesellschaft-klimaschutz.de/zertifizierung/zirkularitaet/.

* The CO₂e emissions of the materials used in the product are taken into account. The emissions that arise during the production process are allocated to the product on a pro-rata basis.

created on: 14 August 2024