


play unit Tara



Scope of delivery





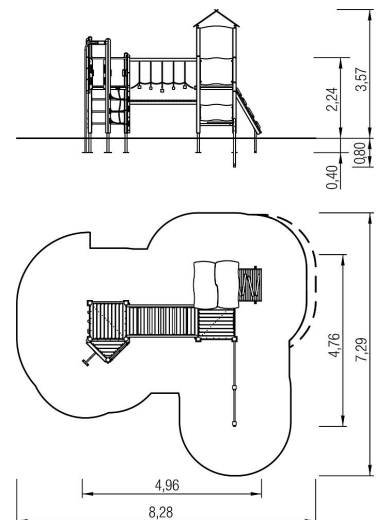




- 2x adapter: softwood or steel
- 13x post construction: softwood or steel
- 4x platform construction: softwood
- 1x roof: high-pressure laminate (HPL)
- 1x climbing board: high-pressure laminate (HPL), glass-fibre-reinforced plastic (GFRP)
- 2x climbing board: high-pressure laminate (HPL)
- 1x ladder vertical: stainless steel (V2A)
- 1x net ascent vertical: plastic-coated steel cable
- 1x ramp: softwood
- 1x firemans pole: stainless steel (V2A)
- 1x safety platform straight: softwood
- 1x wobbly bridge straight: softwood, galvanised steel
- 3x parapet: high-pressure laminate (HPL)
- 4x passage safety device: stainless steel (V2A)
- 2x access restriction: high-pressure laminate (HPL)
- 1x play parapet hole: high-pressure laminate (HPL), acrylic glass (UV-resistant)
- 1x play parapet bars: high-pressure laminate (HPL)
- 1x play parapet dice wheel: high-pressure laminate (HPL), galvanised steel
- 2x grip set: aluminium, coated

- 1x seating corner: softwood
- fittings: stainless steel (V2A)















Technical data


	Material	SW pi
	Minimum space	8,28x7,29x4,04 m
	Impact protection net	41,5 m ²
	Free falling height	224 cm
	Ground constitution DE/NL/BE	at least sand
	Ground constitution all except DE/NL/BE	at least sand
	mx. number of users	76
	Certificate	Z2_010651_0526_Rev00
	Tested according to standard	EN 1176 - 1/3/7

Installation information

	Foundations	16x CF or 14x PFs + 2x CF
	Fundamentlevel	ET 400/700
	Assembly	2 persons/8 h
	PF Accessories	14x 5632540
	PF drainage	0,05 m ³
	PF concrete	0,20 m ³
	PF excavation	1,76 m ³
	CF drainage	0,05 m ³
	CF concrete	0,87 m ³
	CF excavation	2,02 m ³



5 11 018 011 10 play unit Tara

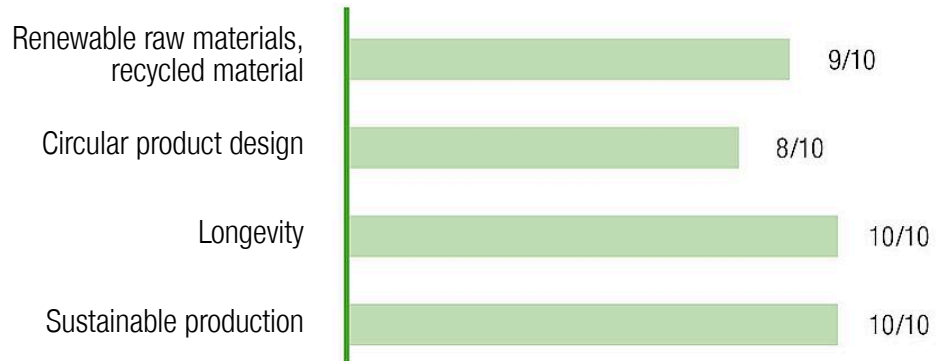

CO₂ emissions of the product

1393,6 kg


Material share of renewable raw materials

64%

Recyclate content

13%

Circularity score



Weighted emission factor of the product*



Disclaimer:

This dashboard for the circularity index of the 'Circular Product' certification was generated automatically and is based on the corresponding certification of eibe Produktion + Vertrieb GmbH & Co KG, Industriestraße 1, 97285 Röttingen, which was issued on 16 May 2024 by the Gesellschaft für Klimaschutz München GmbH (GKM GmbH) on the basis of the example product Albion play unit from the eibe unique® product line. eibe Produktion + Vertrieb GmbH & Co KG is liable for the accuracy of the contents. The award criteria of the private-law certification 'Circular Product' of GKM GmbH can be viewed at gesellschaft-klimaschutz.de/zertifizierung/zirkularitaet/.

* The CO₂e emissions of the materials used in the product are taken into account. The emissions that arise during the production process are allocated to the product on a pro-rata basis.

created on: 14 August 2024