

play unit Firefighting Operation, solo



Age indication



Speed



Fitness



Social skills



Fine motor skills




Balance



Imagination


Scope of delivery

- 10x adapter: softwood or steel
- 18x post construction: softwood or steel
- 21x platform construction: softwood
- 1x octagon roof: softwood, high-pressure laminate (HPL), stainless steel (V2A)
- 5x climbing board: high-pressure laminate (HPL), glass fibre reinforced plastic (GFRP)
- 1x climbing tunnel: stainless steel (V2A)
- 1x ladder vertical: stainless steel (V2A)
- 1x sliding pole: stainless steel (V2A)
- 1x stairs: softwood
- 1x X-ascent: softwood
- 1x suspension bridge straight: softwood, galvanised steel
- 31x parapet: high-pressure laminate (HPL)
- 1x parapet: softwood
- 3x parapet: Polycarbonat (UV-Beständig)
- 4x passage safety device: stainless steel (V2A)
- 1x slide entry board: high-pressure laminate (HPL)
- 1x access restriction: high-pressure laminate (HPL)
- 1x play parapet gear wheel: high-pressure laminate (HPL)
- 3x platform decoration: high-pressure laminate (HPL)
- 1x Feuerwehrauto: softwood, high-pressure laminate (HPL), stainless steel (V2A), plastic-coated steel cable
- 8x grip set: aluminium, coated
- 2x square timber: softwood
- 1x seat corner: softwood
- fittings: stainless steel (V2A)

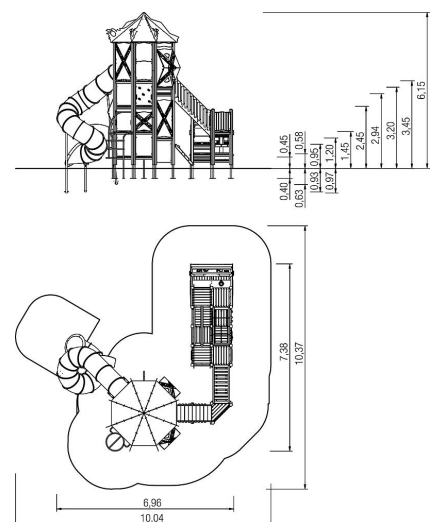





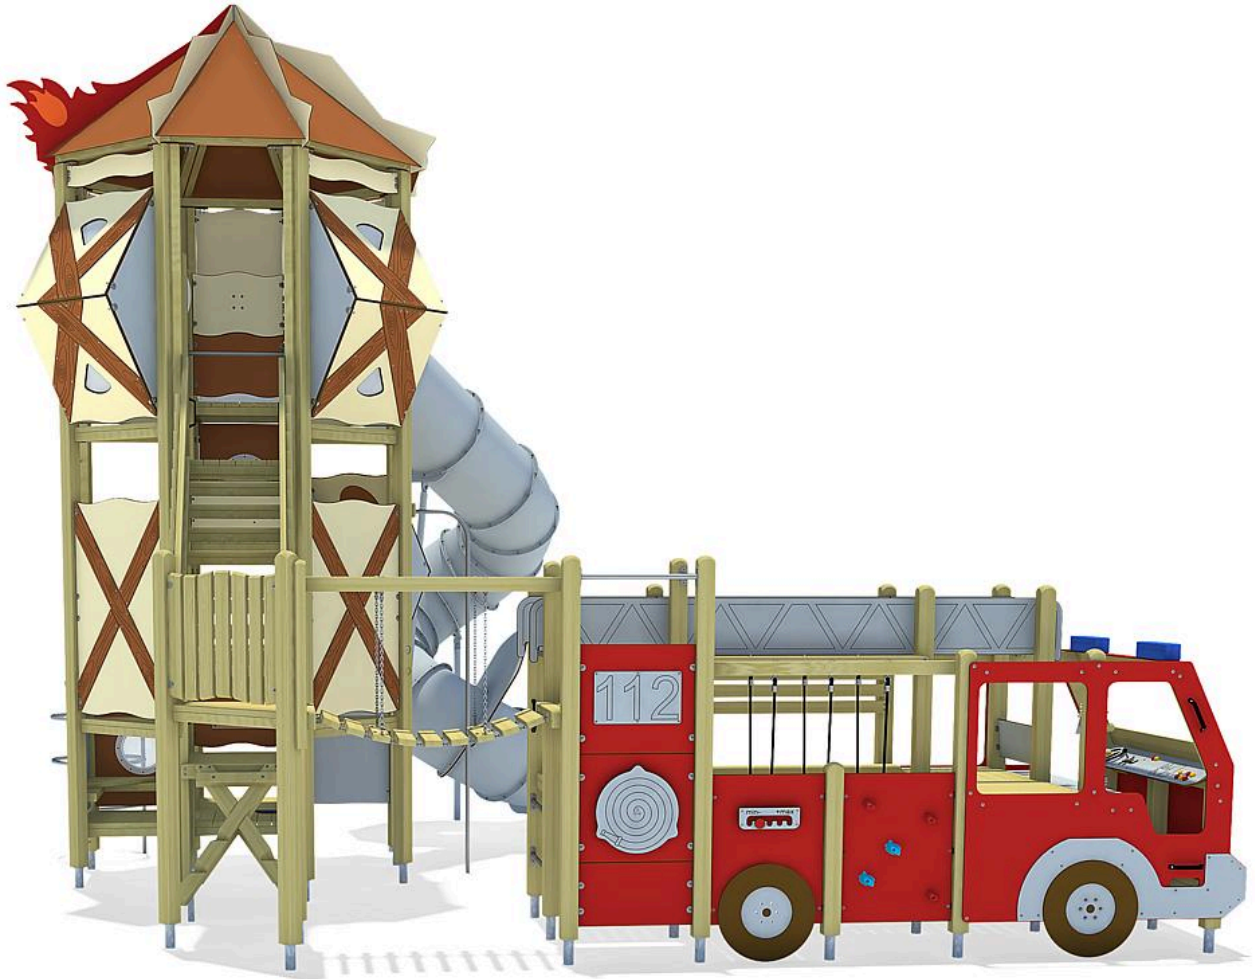



3x play parapet porthole: high-pressure laminate (HPL),
plastic













play unit Firefighting Operation, solo




Technical data

	Material	SW pi
	Minimum space	10,04x10,37x6,15 m
	Impact protection net	66,0 m ²
	Free falling height	295 cm
	Ground constitution GE/NL/B	at least Sand
	Ground constitution all except GE/NL/B	at least Sand
	mx. number of users	98
	Tested according to standard	EN 1176 - 1/3/7

Installation information

	Foundations	26x CF or 1x CF + 25x PFs
	Fundamentlevel	ET 400
	Assembly	2 persons/29 h
	Lifting devices	Excavator/wheel loader
	PF Accessories	23x 5632540 + 15x 5631120
	PF drainage	-
	PF concrete	3,14 m ³
	PF excavation	8,43 m ³
	CF Accessories	39x 5631120
	CF drainage	-
	CF concrete	4,24 m ³
	CF excavation	8,85 m ³


Accessories

-  Slides for platform heights: 1x 345 cm
- Installation accessories e.g. PF
- Please order accessories separately to complete the appliance.



5 11 807 011 00

play unit Firefighting Operation, solo

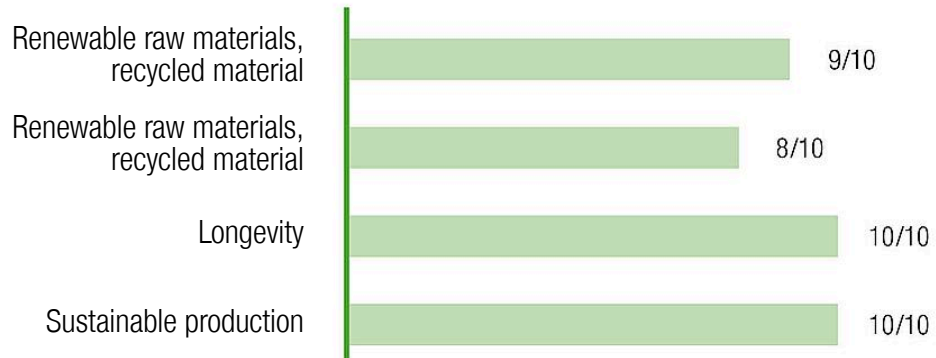

CO₂ emissions of the product

4658,1 kg


Material share of renewable raw materials

59%


Recyclate content

8%

Circularity score



Weighted emission factor of the product*

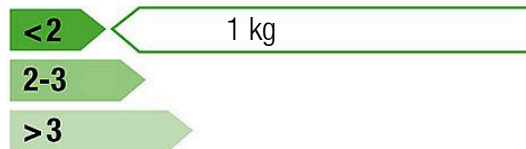

Disclaimer:

This dashboard for the circularity index of the 'Circular Product' certification was generated automatically and is based on the corresponding certification of eibe Produktion + Vertrieb GmbH & Co KG, Industriestraße 1, 97285 Röttingen, which was issued on 16 May 2024 by the Gesellschaft für Klimaschutz München GmbH (GKM GmbH) on the basis of the example product Albion play unit from the eibe unique® product line. eibe Produktion + Vertrieb GmbH & Co KG is liable for the accuracy of the contents. The award criteria of the private-law certification 'Circular Product' of GKM GmbH can be viewed at gesellschaft-klimaschutz.de/zertifizierung/zirkularitaet/.

* The CO₂e emissions of the materials used in the product are taken into account. The emissions that arise during the production process are allocated to the product on a pro-rata basis.

created on: 14 August 2024