climbo 5 25 921 011 19

Climbing combination Summit, solo

Age indication | Fitness | Balance | Social skills | Speed

Scope of delivery

2x post construction: wood and steel
7x post construction: softwood or steel
1x frame panel small: high-pressure laminate (HPL)
1x crossbar 01 ascent: softwood, high-pressure laminate (HPL)
1x tangle of ropes: plastic-coated steel rope, stainless steel (V2A)
2x parapet: high-pressure laminate (HPL)
1x handles: aluminium, coated
1x climbing structure: softwood, plastic-coated steel rope, steel galvanised
fittings: stainless steel (V2A)

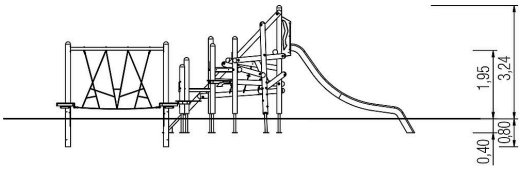

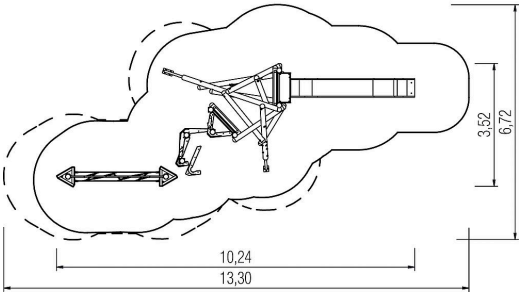

eibe play Ltd, eibe House | Forsyth's Home Farm | A3 Bypass Road, Hurtmore, Surrey | GU8 6 AD | UK | Fon +44 1483 813834 | eibe@eibe.co.uk | www.eibe.co.uk

climbo® 5 25 921 011 19

Climbing combination Summit, solo

Technical data

Material	SW pi
Minimum space	13,17x6,66x3,75 m
Impact protection net	47,0 m²
Free falling height	195 cm
Ground constitution DE/NL/BE	at least sand
Ground constitution all except DE/NL/BE	at least sand
Size	10,24x3,52x3,24 m
mx. number of users	41
Certificate	Z2_010651_0568_Rev00
Tested according to standard	EN 1176 - 1/7
Service interval (in months)	3

Installation information

Foundations	11x CF or 2x PFs + 6x PFI + 2x CF
Fundamentlevel	ET 400/800
PF Accessories	2x 5632540 + 6x 5630730 + 8x 5631120
PF drainage	0,05 m³
PF concrete	0,20 m³
PF excavation	5,99 m³
CF Accessories	13x 5631120
CF drainage	0,05 m³
CF concrete	0,99 m³
CF excavation	2,30 m³

Accessories

Slides for platform heights: 1x 195 cm

Installation accessories e.g. PF
Please order accessories separately to complete the appliance.

Legend: PF=prefabricated foundation, CF=concrete foundation, ET=burial depth, GFRP=glass-fibre reinforced plastic, VA=stainless steel, PH=platform height

eibe play Ltd, eibe House | Forsyth's Home Farm | A3 Bypass Road, Hurtmore, Surrey | GU8 6 AD | UK | Fon +44 1483 813834 | eibe@eibe.co.uk | www.eibe.co.uk